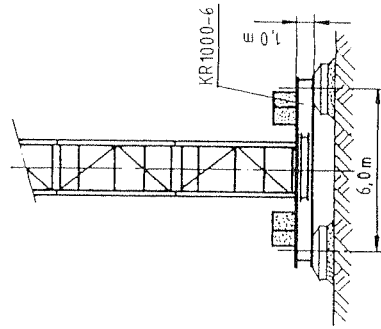


(Andere Unterwagen und Kreuzrahmen auf Anfrage)

⊗ Bei 4-fachem Seilstrang reduziert sich die Hakenhöhe um 0,3 m.

M 1:200

[illegible]

Wolffkran 262 SL




XIV 10533






Technische Daten

Traglast – Ausladung

		Ausladung [m]	2,6–	30	35	40	45	50	55	60	65	70	Traglast [t]
Auslegerlänge [m]	30	2,6–26,60	12,0	10,50									
	35	2,6–25,65		10,10	8,50								
	40	2,6–25,35		9,97	8,38	7,20							
	45	2,6–25,10		9,85	8,28	7,11	6,20						
	50	2,6–24,00		9,40	7,90	6,77	5,90	5,20					
	55	2,6–23,10		8,98	7,54	6,46	5,62	4,95	4,40				
	60	2,6–22,00		8,50	7,13	6,10	5,30	4,66	4,14	3,70			
	65	2,6–21,35		8,22	6,88	5,89	5,11	4,49	3,98	3,56	3,20		
	70	2,6–20,30		7,77	6,50	5,55	4,81	4,22	3,74	3,33	2,99	2,70	

Anordnung der Gegengewichte

Ausleger [m]	30	35	40	45
zum Turm				
Gesamtgewicht [t]	8,2	9,3	11,3	14,4

50	55	60	65	70
				
14,4	17,5	20,6	23,7	26,8

Arbeitsgeschwindigkeiten – Motorleistungen

Triebwerk [Typ]	Arbeitsgeschwindigkeiten [Bewegung] [m/min]		Seil- strang	max. Hub [m]	Leistung [kW]	Gesamtmotoren- [kW]		
Hw 6663	Heben bis	2,0t	124,0	2	200	66	84,6	
		4,0t						70,0
		6,0t						50,0
	Heben bis	4,0t	62,0	4	100			
8,0t		35,0						
12,0t		25,0						
Tw 70 FSG	Katzfahr. bis	6,0t 12,0t	80/40/20 40/20			6,0		
Dw – FSG	Drehen	0,7 min ⁻¹			2 x 6,3			
Fw	Kranfahren	25			11 – 22	95,6 – 106,6		

Technische Daten

Traglast – Ausladung

		Ausladung [m]	2,6–	30	35	40	45	50	55	60	65	70	Traglast [t]
Auslegerlänge [m]	30	2,6 – 26,60	12,0	10,50									
	35	2,6 – 25,65		10,10	8,50								
	40	2,6 – 25,35		9,97	8,38	7,20							
	45	2,6 – 25,10		9,85	8,28	7,11	6,20						
	50	2,6 – 24,00		9,40	7,90	6,77	5,90	5,20					
	55	2,6 – 23,10		8,98	7,54	6,46	5,62	4,95	4,40				
	60	2,6 – 22,00		8,50	7,13	6,10	5,30	4,66	4,14	3,70			
	65	2,6 – 21,35		8,22	6,88	5,89	5,11	4,49	3,98	3,56	3,20		
	70	2,6 – 20,30		7,77	6,50	5,55	4,81	4,22	3,74	3,33	2,99	2,70	

Anordnung der Gegengewichte

Ausleger [m]	30	35	40	45
zum Turm				
Gesamtgewicht [t]	8,2	8,2	11,3	14,4

50	55	60	65	70
14,4	17,5	20,6	23,7	26,8

Arbeitsgeschwindigkeiten – Motorleistungen

Triebwerk [Typ]	Arbeitsgeschwindigkeiten		Seil- strang	max. Hub [m]	Leistung [kW]	Gesamtmotoren- [kW]
	[Bewegung]	[m/min]				
Hw 6753	Heben bis 2,0t 4,0t 6,0t	140,0 80,0 56,0	2	200	75	93,6
	Heben bis 4,0t 8,0t 12,0t	70,0 40,0 28,0	4	100		
Tw 70 FSG	Katzfahr. bis 6,0t 12,0t	80/40/20 40/20			6,0	
Dw – FSG	Drehen	0,7 min ⁻¹			2 x 6,3	
Fw	Kranfahren	25			11 – 22	104,6 – 115,6